

273/236
Fig. 1

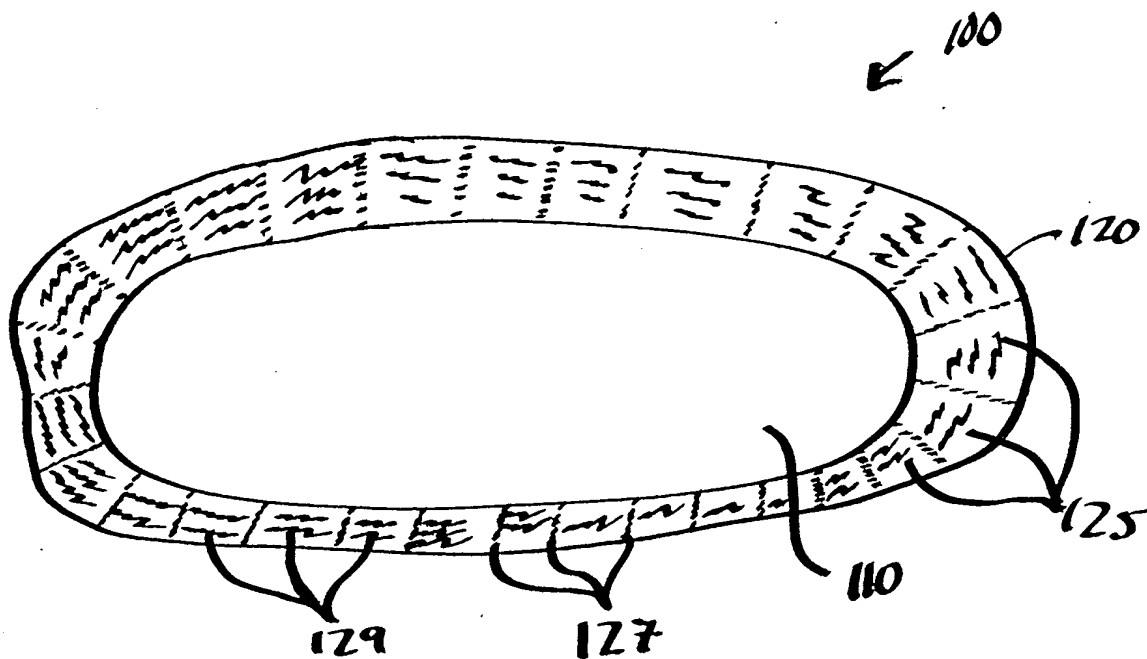



FIG. 1

FOOT CHASE

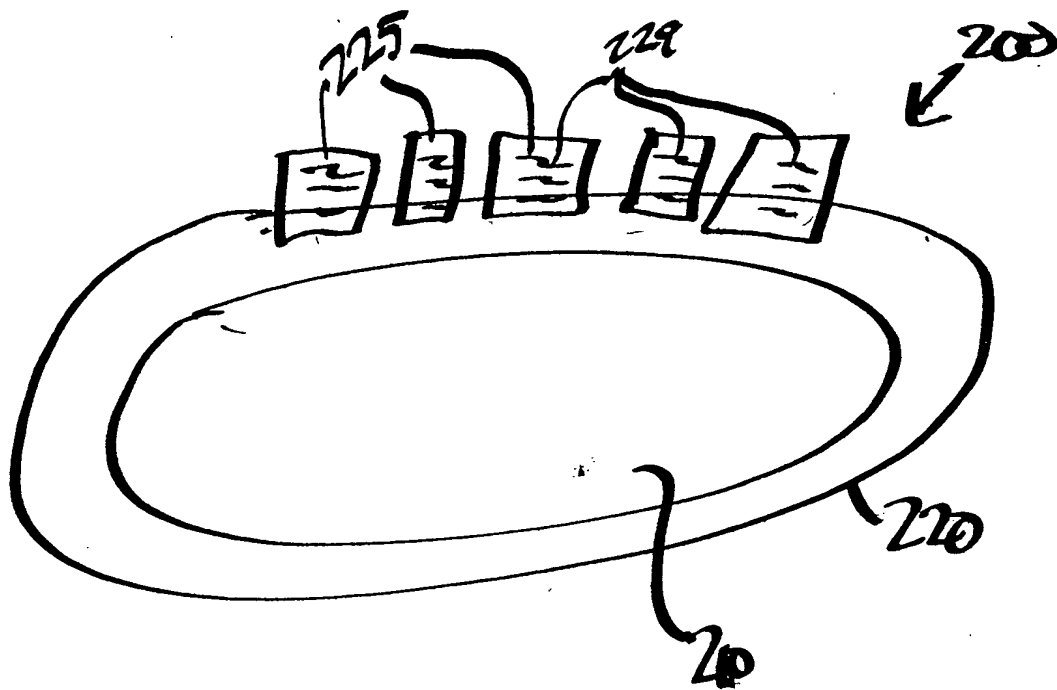


FIG. 2

09035444 400404

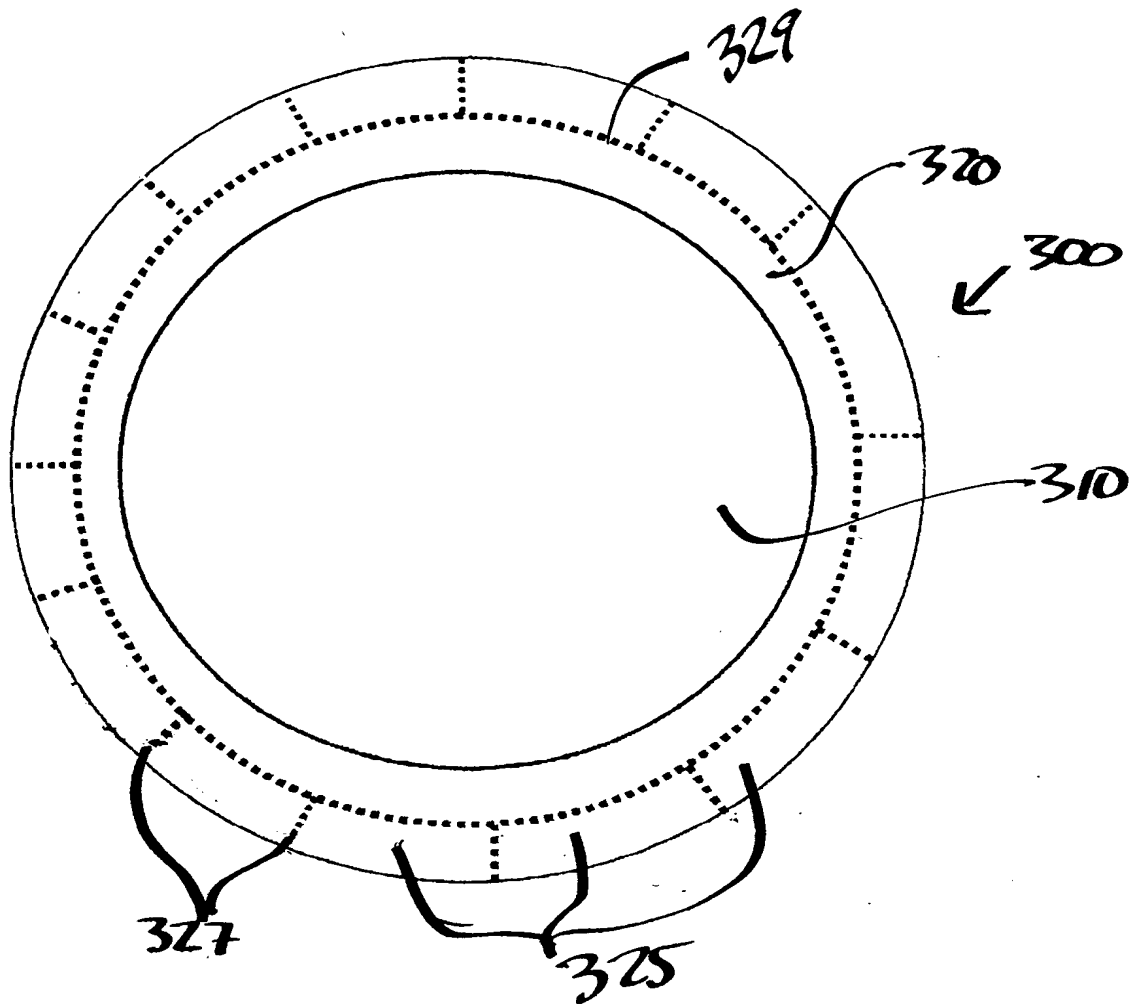


FIG. 3

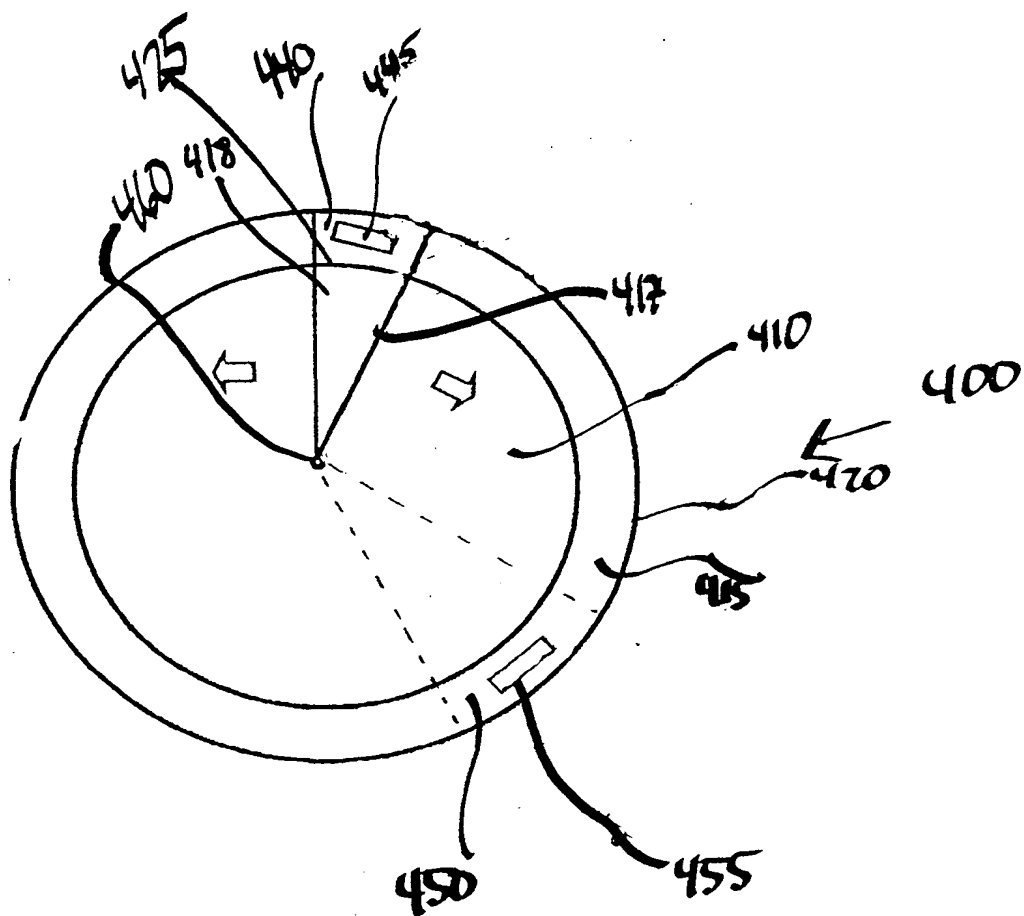


FIG. 4

FIG. 5

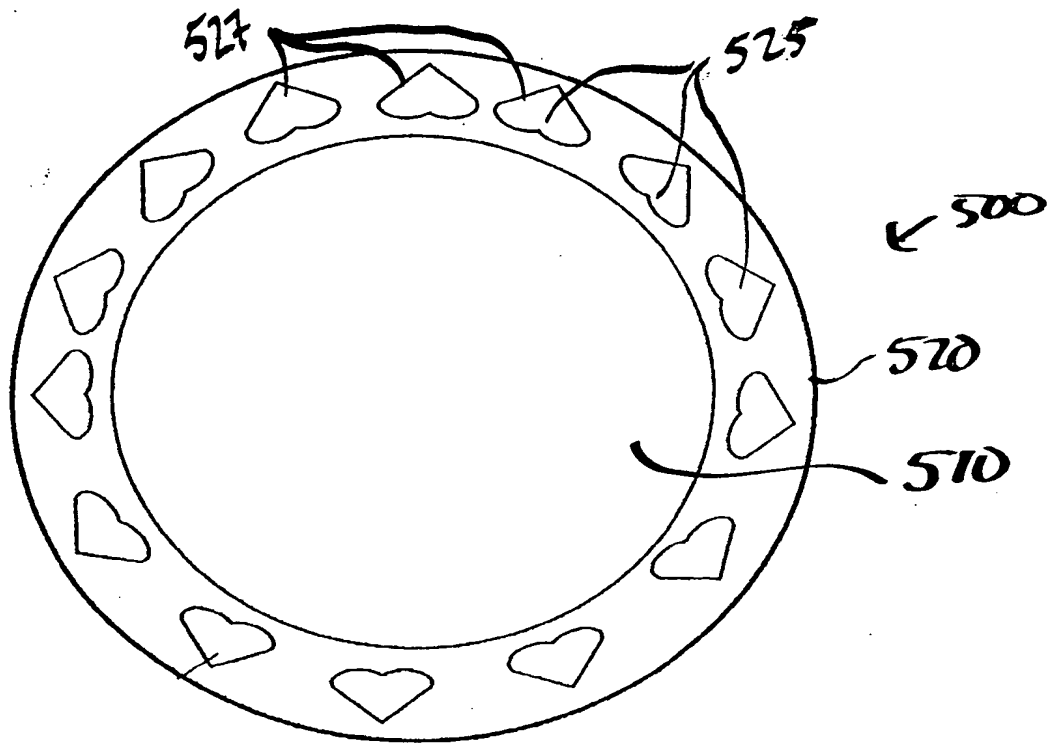
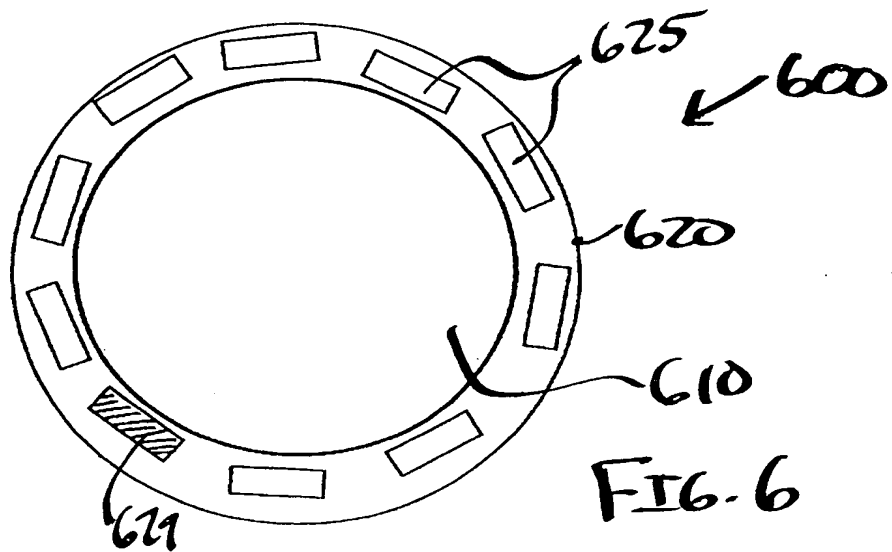


FIG. 5

0955443 100101



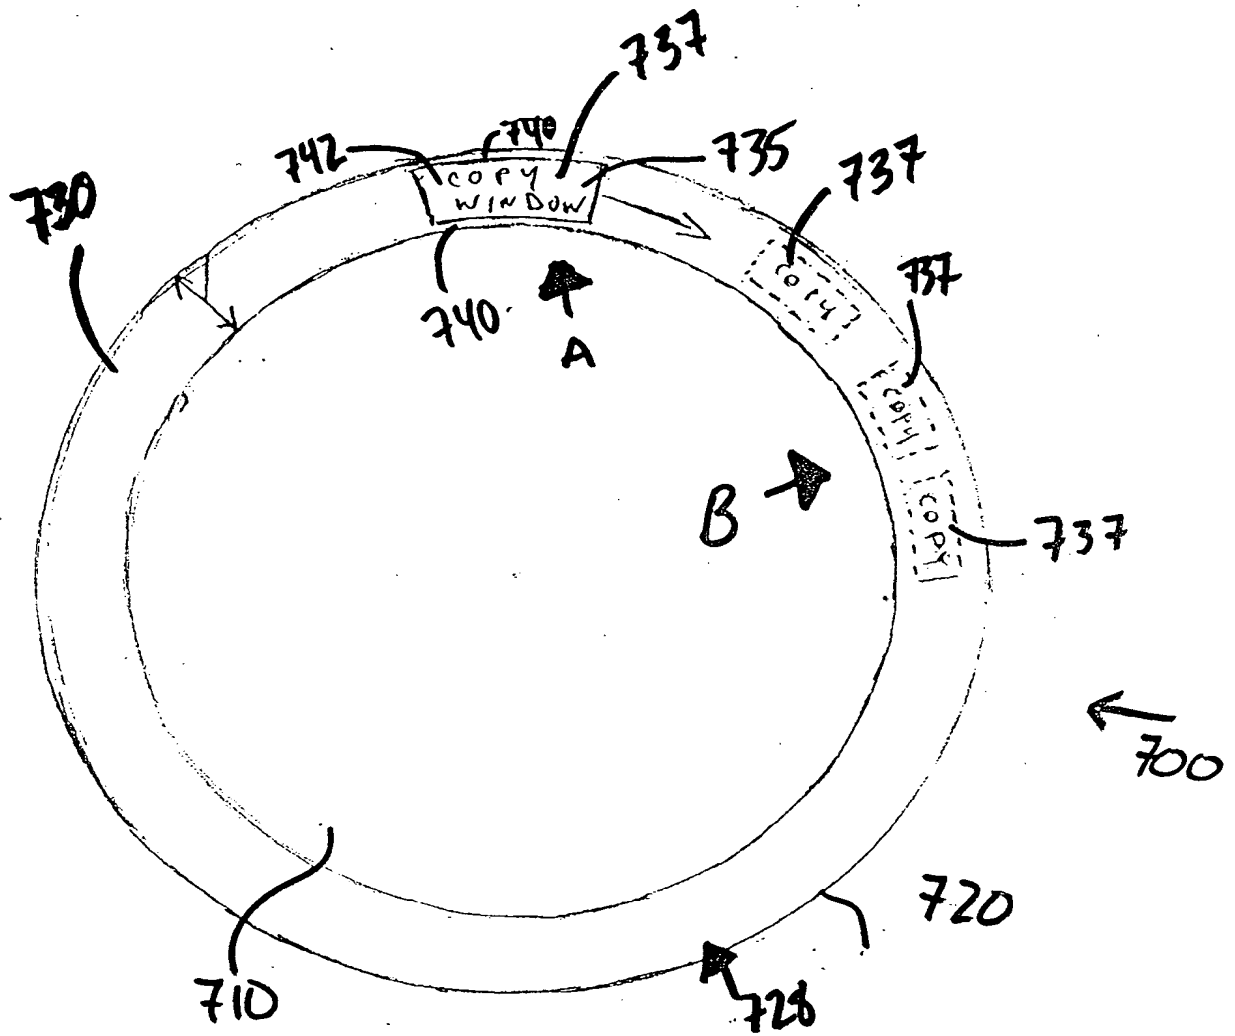


FIG. 7

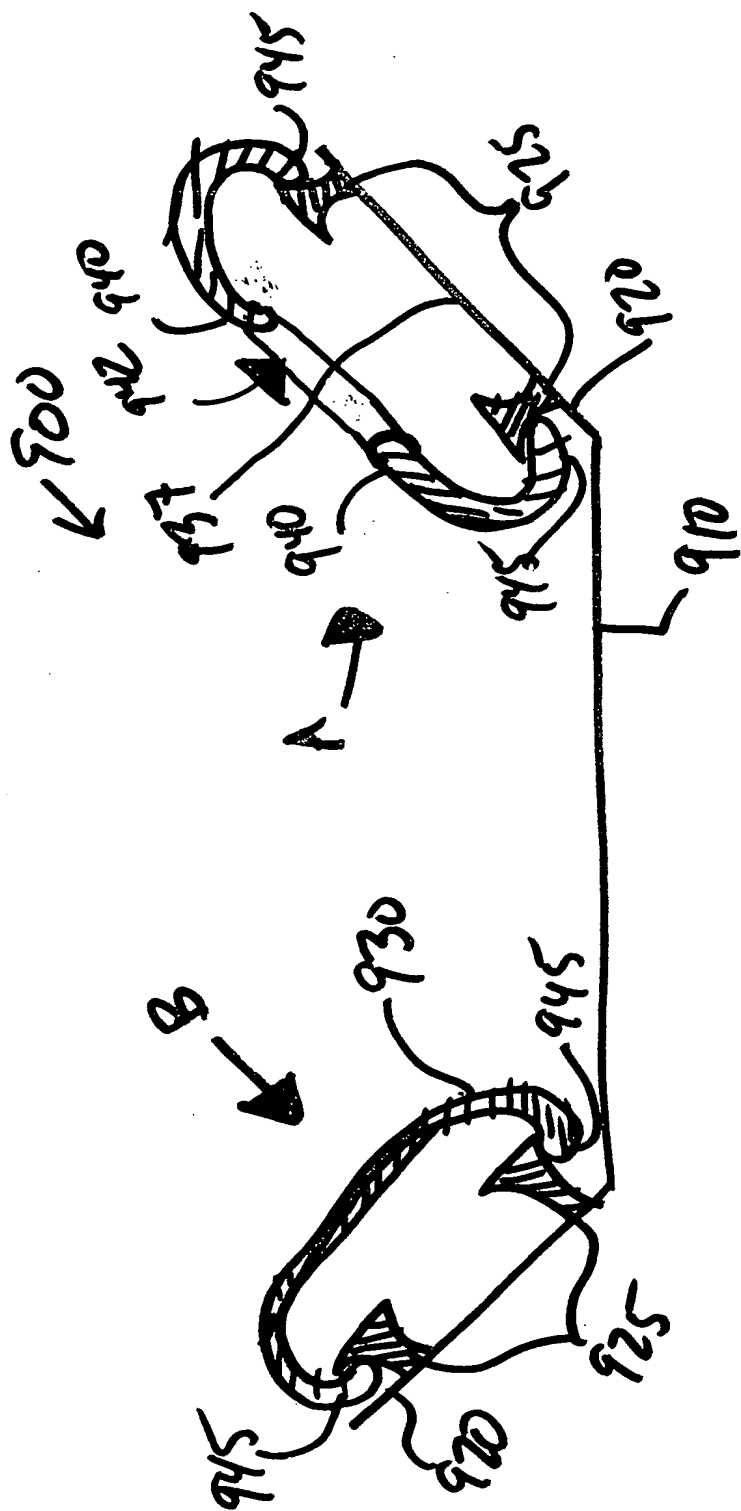



FIG. 9A



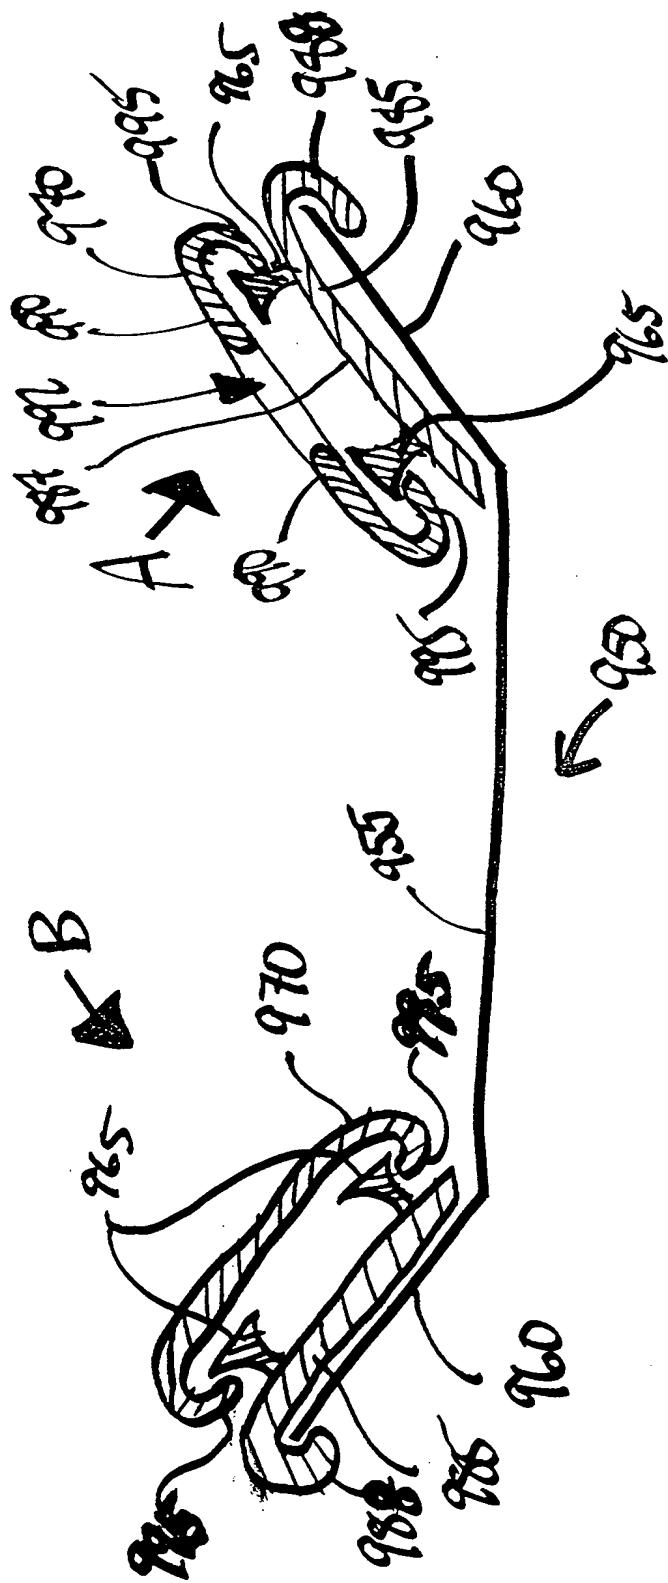


FIG. 9B



96

FIG. 10G

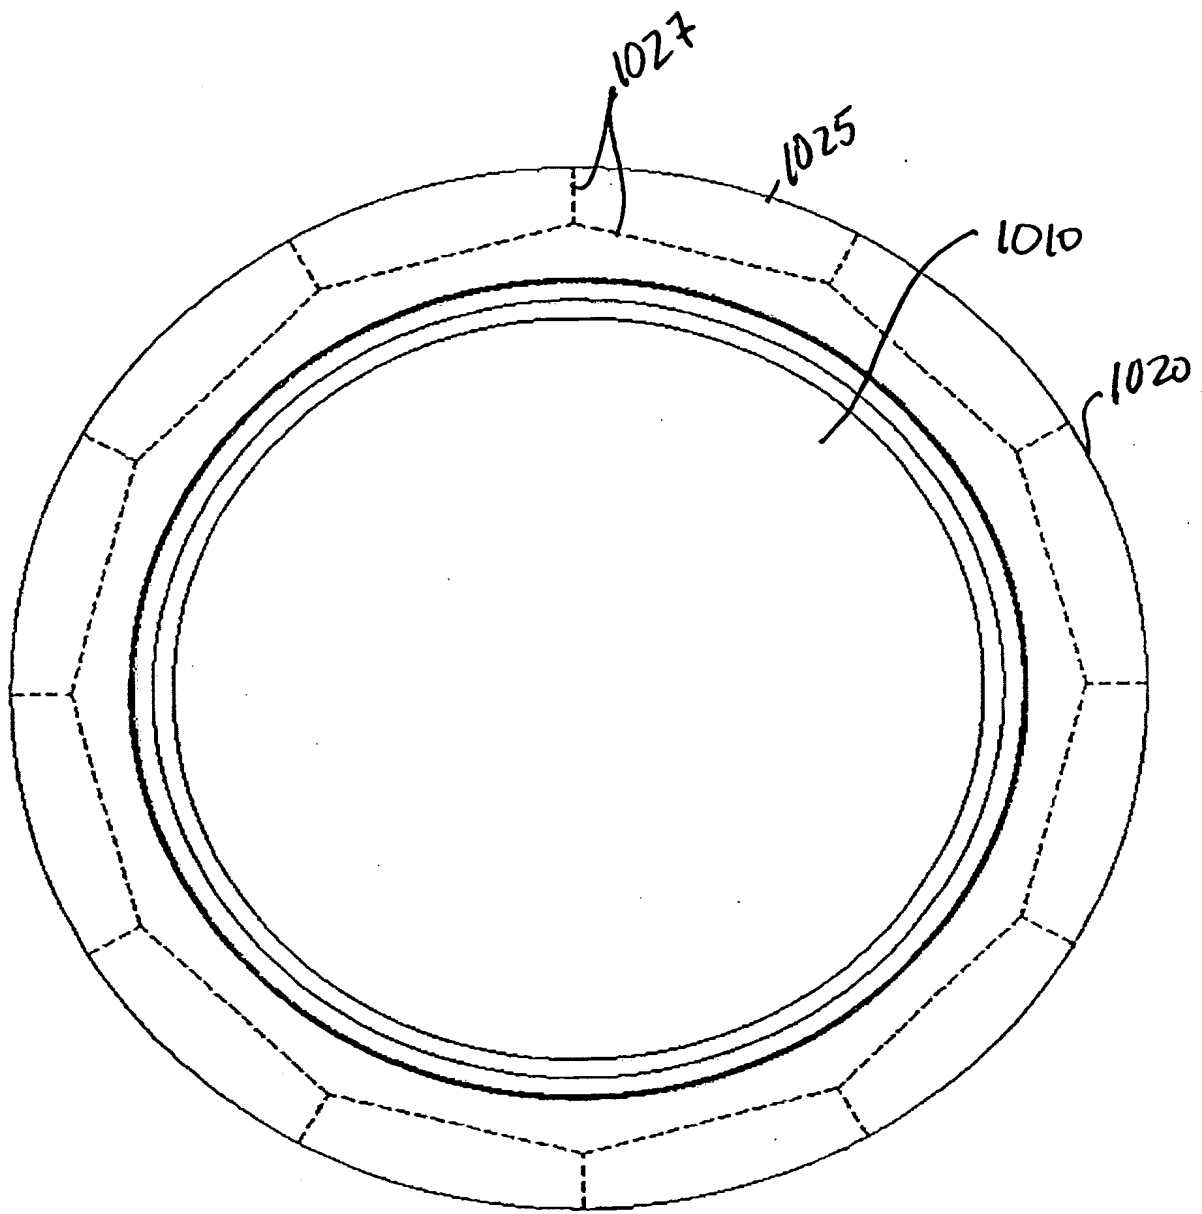


FIG. 10G

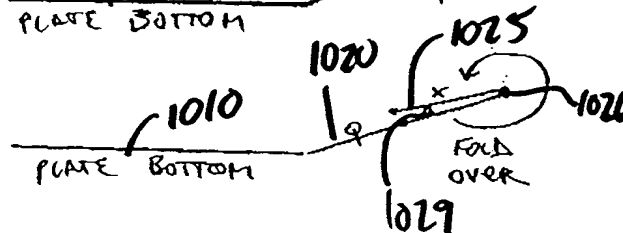
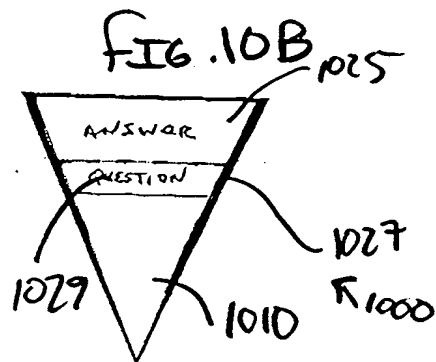


FIG. 11

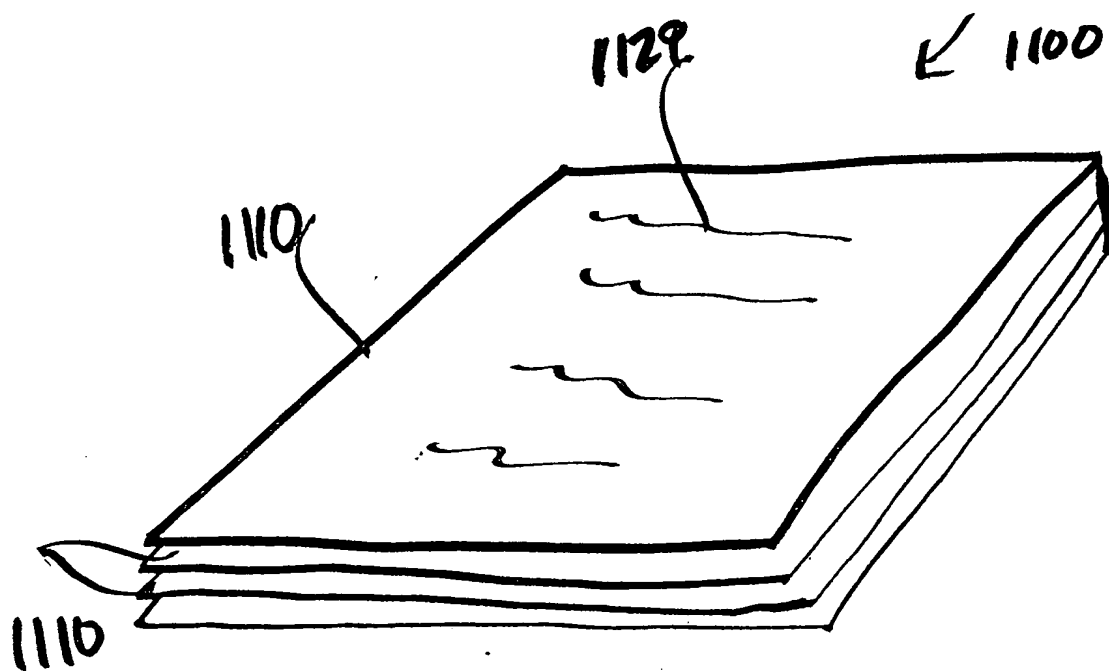


FIG. 11

A diagram of a circular device 1200. It features a central circular area 1210 surrounded by a ring 1210. The ring 1210 is divided into segments 1220 and 1230. Segment 1220 is a dashed rectangular area, and segment 1230 is a solid rectangular area. The device 1200 is shown in a perspective view, with a curved line indicating its circular shape.

FIG. 12

095443 400404

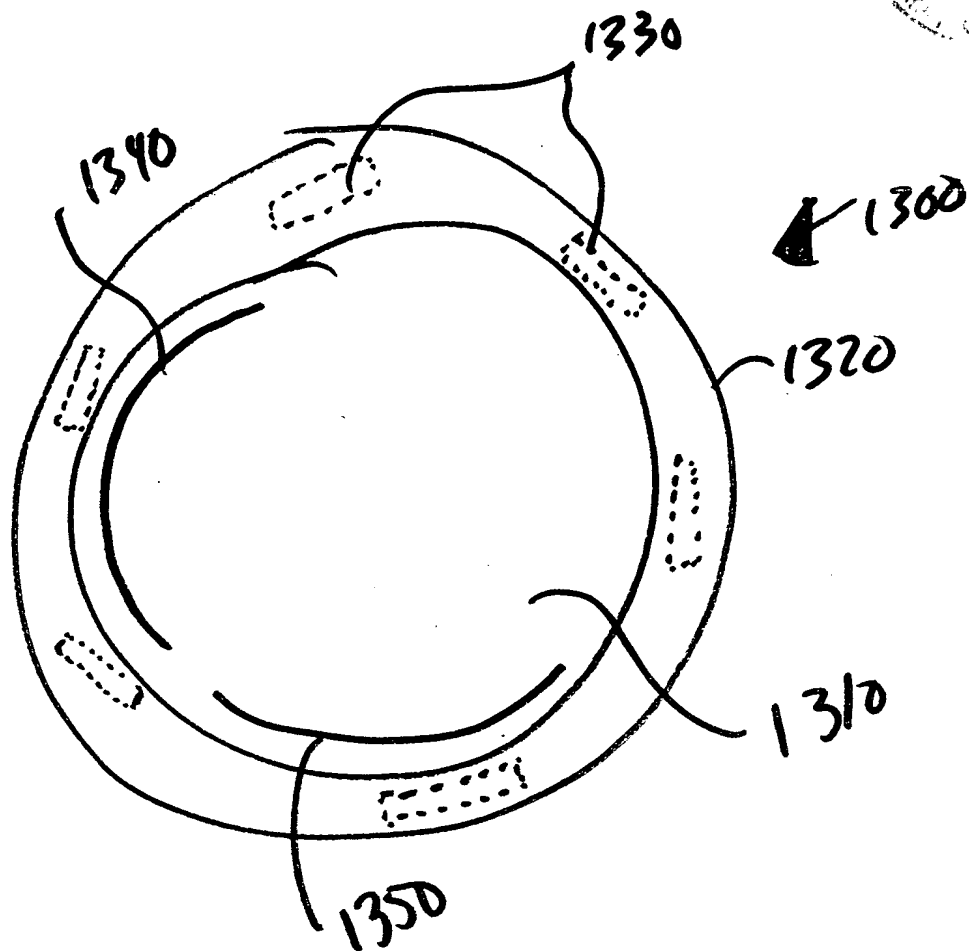


FIG. 13

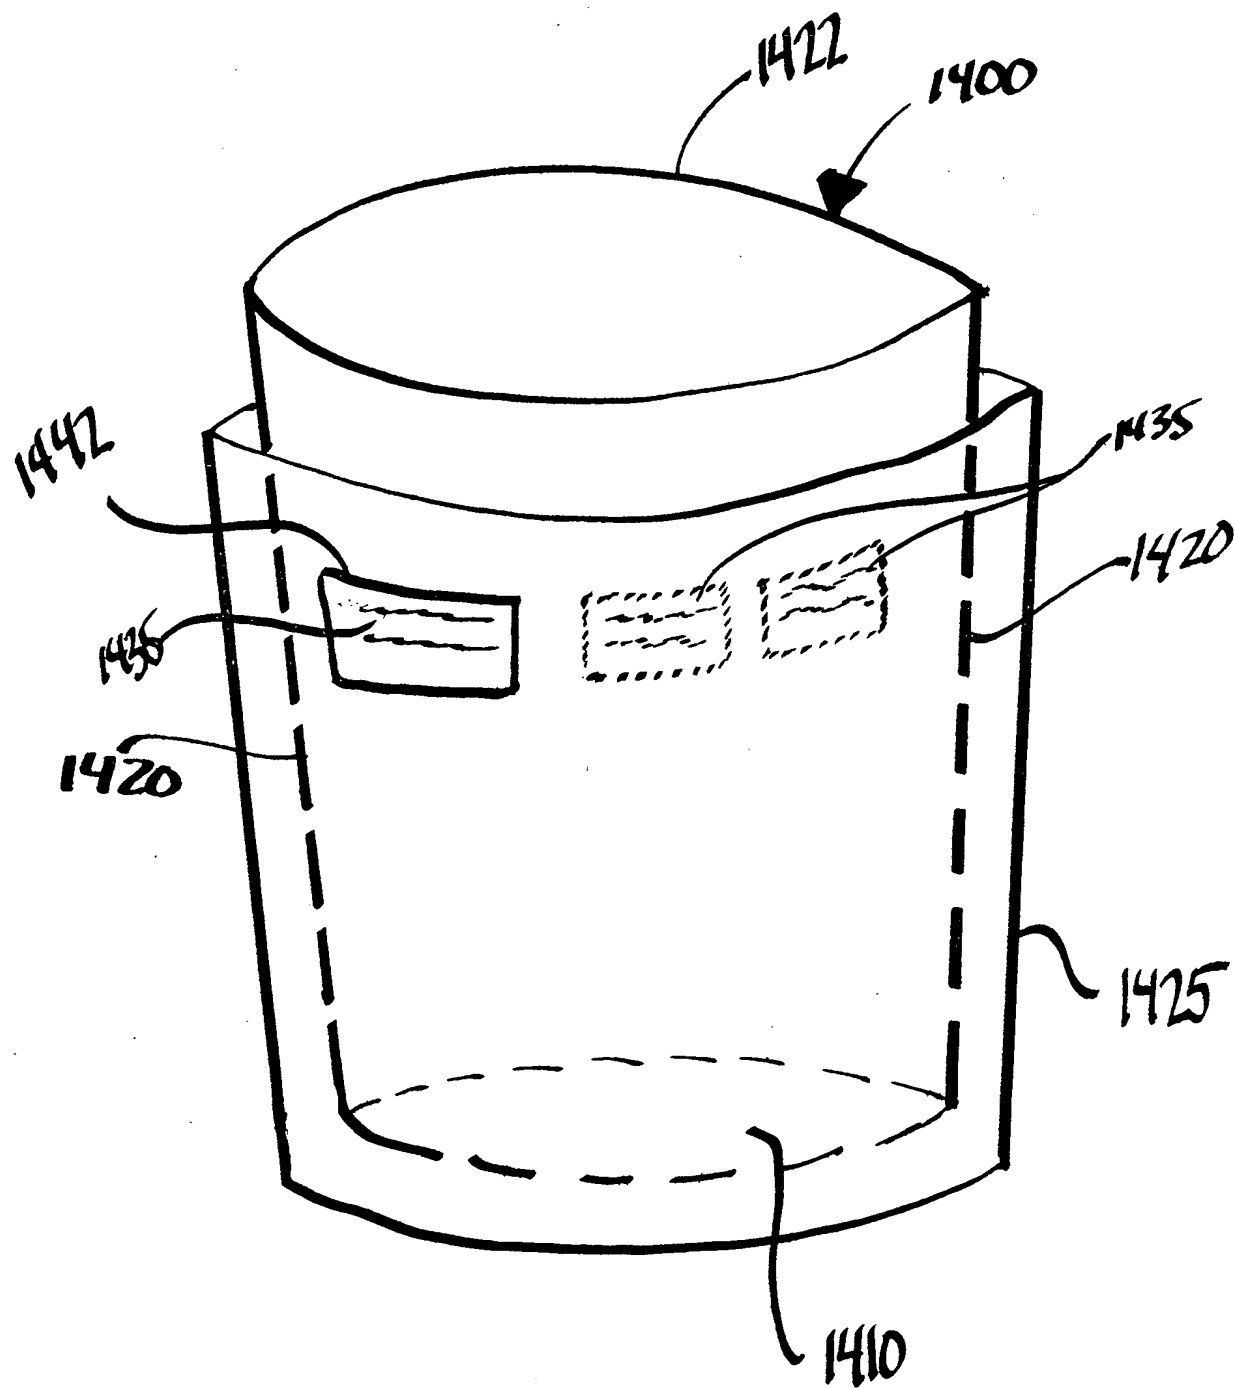


FIG. 14

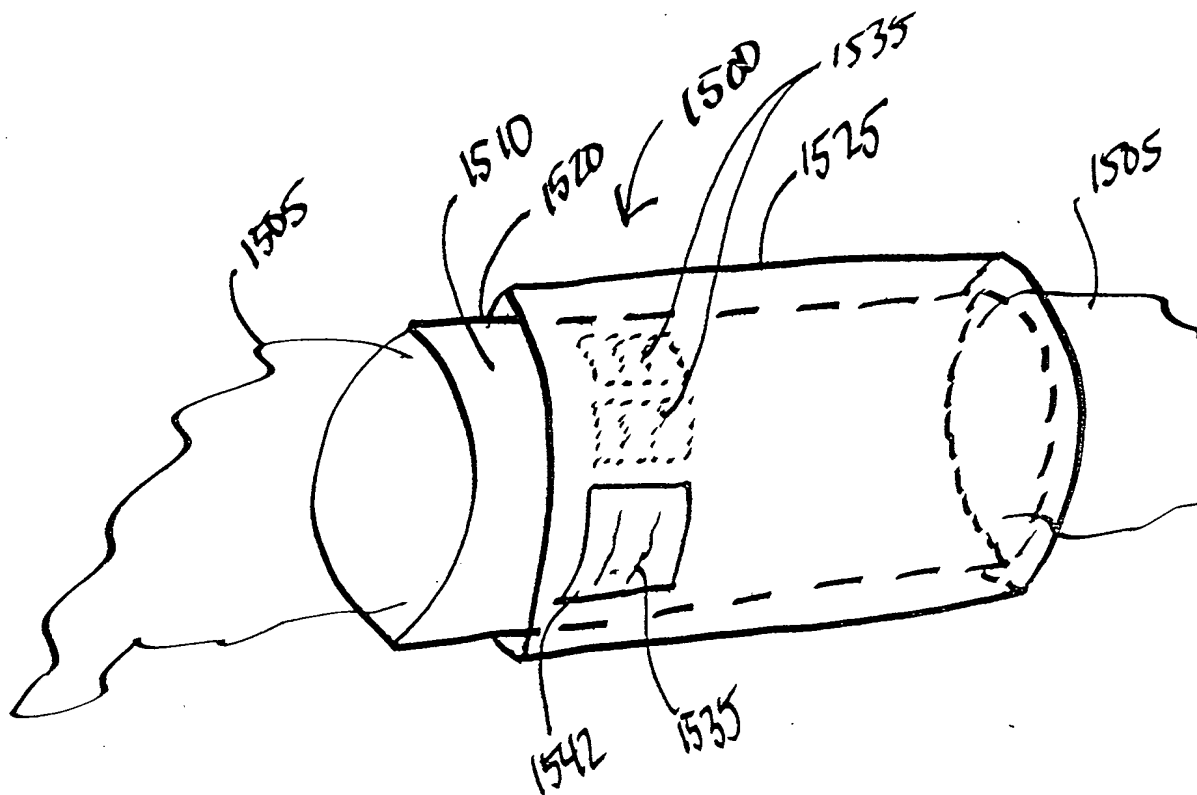


FIG. 15

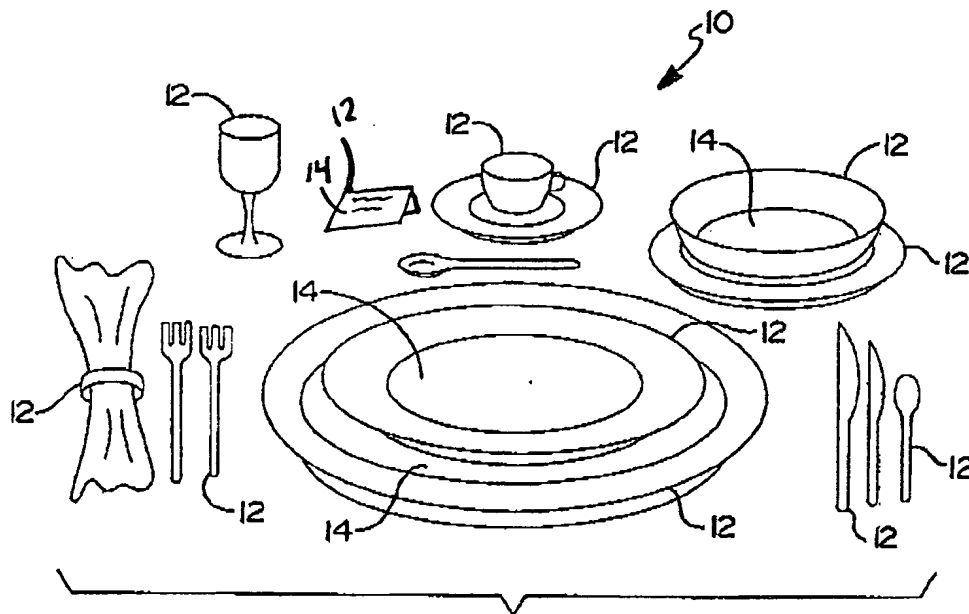


FIG 16

0995413.400104

FIG. 17



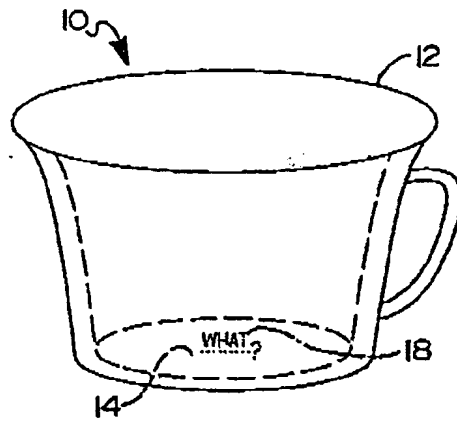


FIG. 18

FIG 19

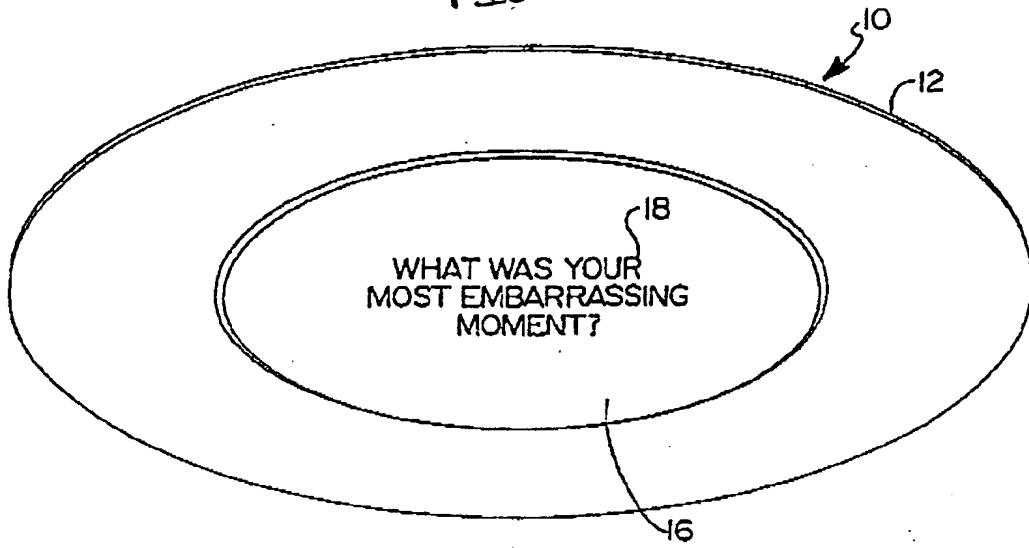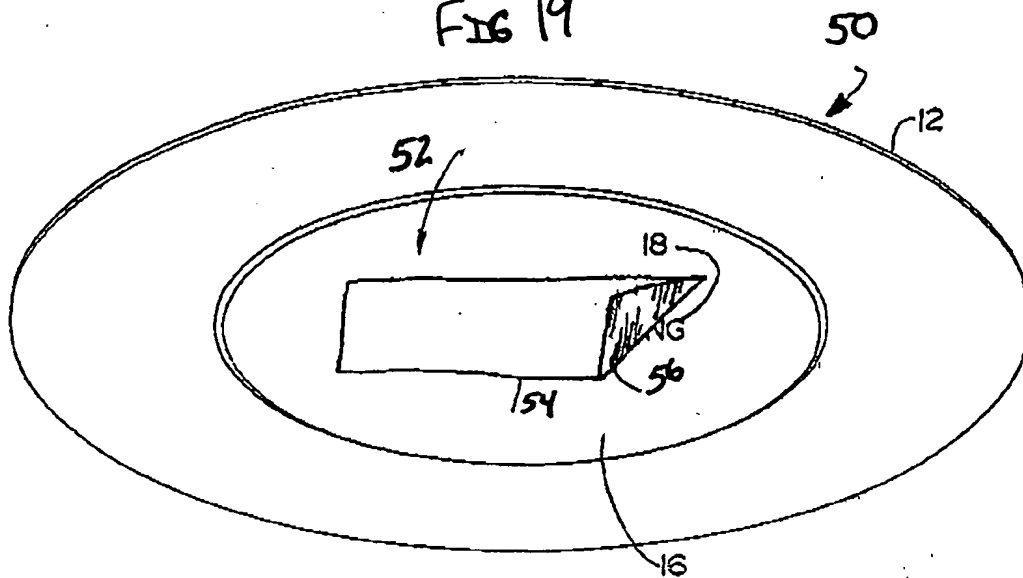

60

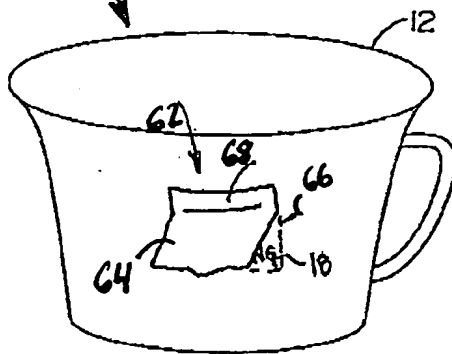


FIG. 20

0925443-100101

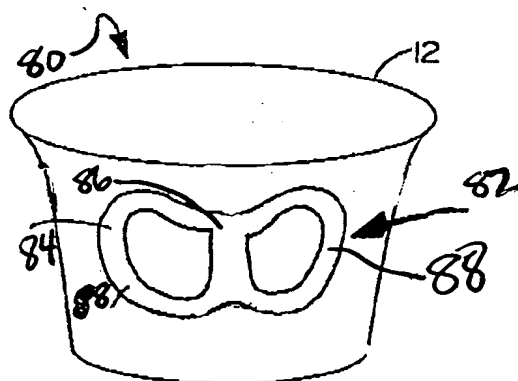
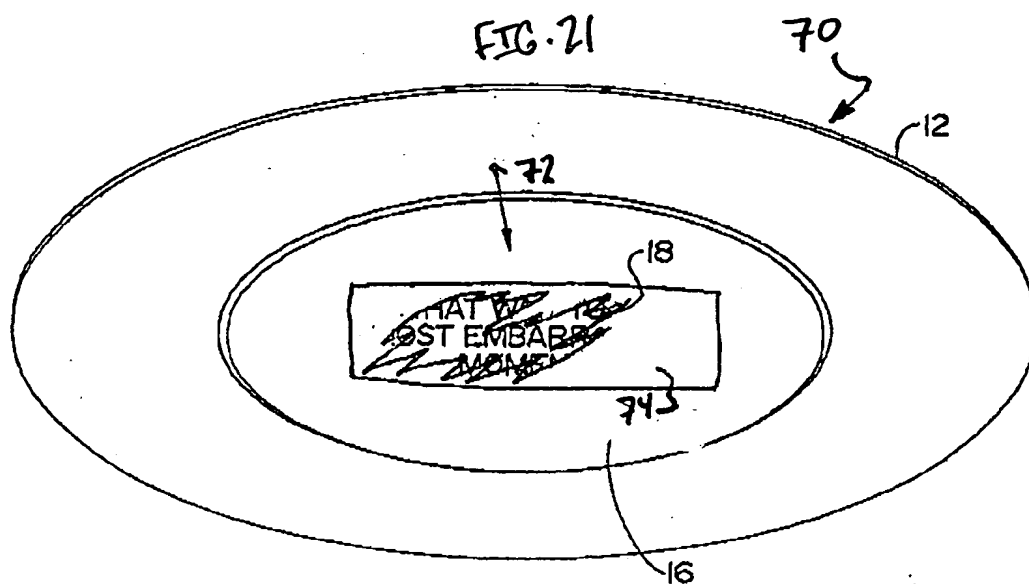


FIG. 22